

N1/66 P 94
 Mahesh Nagar
 Samne Ghat, Lanka
 Varanasi U.P. 221005
 India
 Mob: 0049 176 219 66 0 77
 Mob: 0091 95 323 11 8 68

Produkt	Format (mm) LXBXH	Oberfläche	Durchgefärbt	Paketinhalt	Paketinhalt (M ²)	Paletteinhalt (M ²)	Paket pro Palette	Paket pro Container	Palette pro Container
Feinsteinzeug Vitrified Fliesen	600X600X9,0	Glasiert	Nein	4 St.	1,44	57,6	40	920	23

An ISO 9001:2008 Certified Company

ISO 9001:2008
 CERTIFIED
 COMPANY

Material	Feinsteinzeug
Dichte (g/Cm ³)	> 2,4
Format	Rechteckig
Abriebklasse (PEI)	Guppe IV
Reibungsfaktor	> 0,4
Rutschhemmung	R11+R12
Wasseraufnahme- vermögen	< 0,05 %
Biegefestigkeit	45 N/mm ²
Bruchfestigkeit	> 2500 N
Mohs Härte	> 6

600x600mm
VITRIFIED TILES



PLAIN IVORY



6015 N



6017 N



6018 N



600x600mm
VITRIFIED TILES



6020 N



6022 N



6025 N



6026 N



600x600mm
VITRIFIED TILES




6029 N



6032 N



6033 N

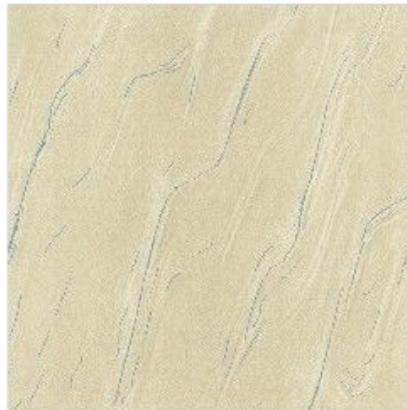

6034 N



600x600mm
VITRIFIED TILES



6038 N



6039 N



6040 N




6042 N




600x600mm
VITRIFIED TILES



6045 N

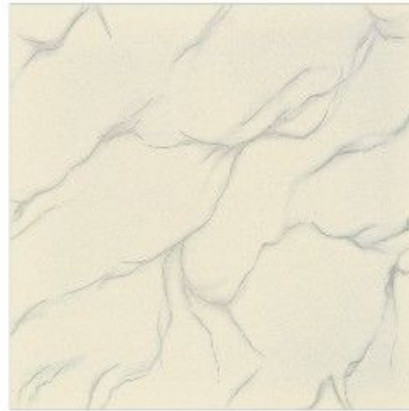

6046 N

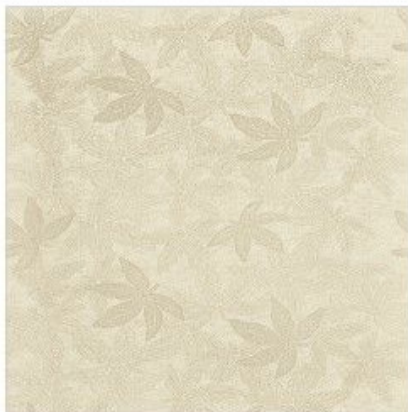

6047 N



6048 N



600x600mm
VITRIFIED TILES



6049 N



6050 N



6051 N



600x600mm
VITRIFIED TILES



6052 N




6053 N



6542 N



600x600mm
VITRIFIED TILES

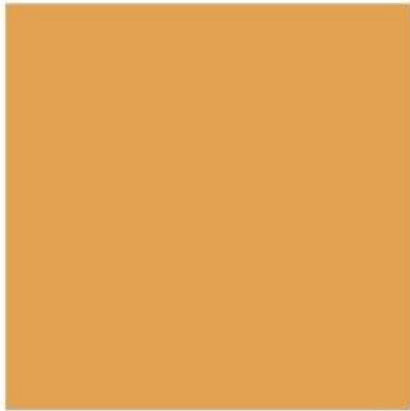

JESALMER



TERRACOTTA



BLACK




600x600mm


VITRIFIED TILES

FULL BODY WHITE


SERIES

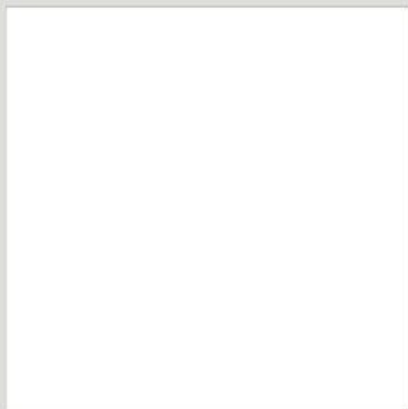


1010 N

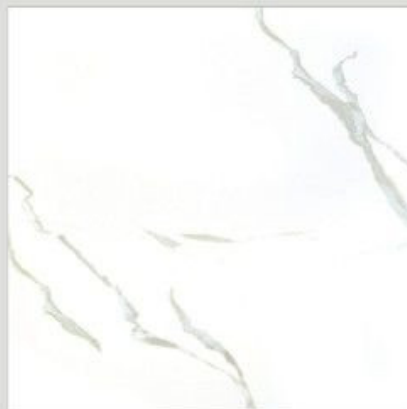

1013 N

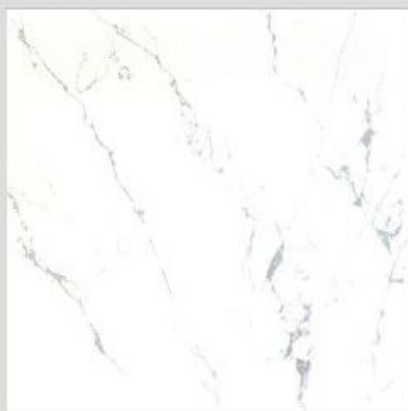

1014 N

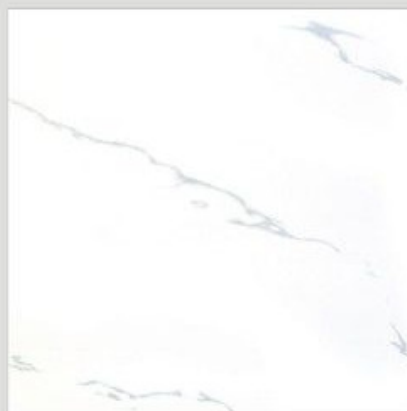

1015 N




600x600mm


VITRIFIED TILES

FULL BODY WHITE

SERIES

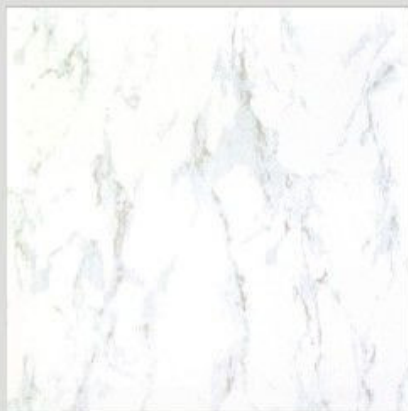


1017 N

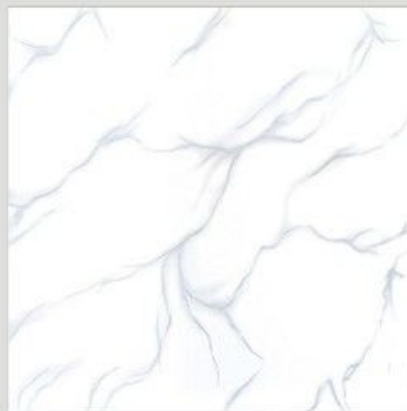

1046 N



1018

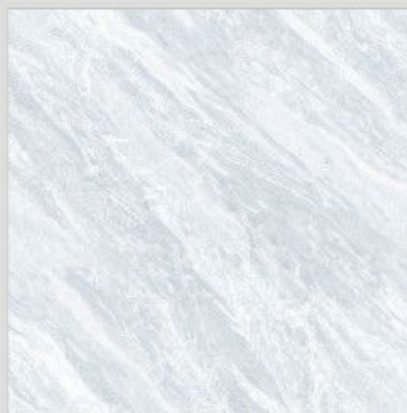

1019




600x600mm

VITRIFIED TILES

FULL BODY WHITE

SERIES

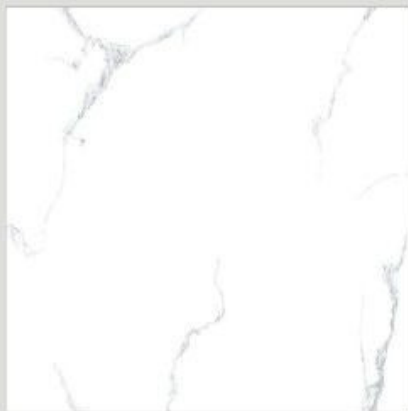

1020



1021



1022



1023



600x600mm VITRIFIED TILES

Technical Specification


Sr. No.	Particulars	Standard as per ISO 13006/EN 176 Group B1a	Test Results	Method of Testing
1	Deviation in length	± 0.60 %	± 0.10 %	ISO 10545 - 2
2	Deviation in Thickness	± 5 %	± 2%	ISO 10545 - 2
3	Straightness Of Side	± 0.50 %	± 0.10 %	ISO 10545 - 2
4	Rectangularity	± 0.60 %	± 0.20 %	ISO 10545 - 2
5	Surface Flatness	± 0.50%	± 0.20 %	ISO 10545 - 2
6	Water Absorption	< 0.05 %	< 0.05 %	ISO 10545 - 2
7	Mohs Hardness	> 6	> 6	EN 101
8	Flexural Strength	> 35 N/mm ² %	> 45 n/mm ²	ISO 10545 - 4
9	Abrasion Resistance	> 175mm ² %	> 144 mm ²	ISO 10545 - 6
10	Skid Resistance	> 0.4%	> 0.4	ISO 10545 - 17
11	Breaking Strength	1113 N %	> 2500 n	ISO 10545 - 4
12	Density (g/cc)	> 2	2.4	ISO 10545 - 3
13	Frost Resistance	Frost proof	Frost proof	ISO 10545 - 12
14	Chemical Resistance	No damage	No damage	ISO 10545 - 13
15	Thermal Shock Resistance	No damage	No damage	ISO 10545 - 9
16	Color Resistance	No damage	No damage	DIN 51094
17	Thermal Expansion	< 9 x 10 ⁻⁶	< 6 x 10 ⁻⁶	ISO 10545 - 8
18	Stain Resistance	Resistant	Resistant	DIN 51094
19	Moisture	Nil	Nil	DIN 51094
20	Glossiness	---	---	Glossmeter

Note: The colours, texture and pattern of product may not match with the actual product due to printing limitations.

Packing Details

Product	Size	No. of Tiles Per Box	Coverage Area (Approx)	Weight Per Box (Approx)
Vetrified Tiles	600 x 600 mm	4 Pcs.	1.44 Sq. Mtr.	30 Kg.

Properties of our Tiles




Road Map



Tile Laying Instruction

kindly look for the arrow on the back of the & follow the laying patterns as shown beside.

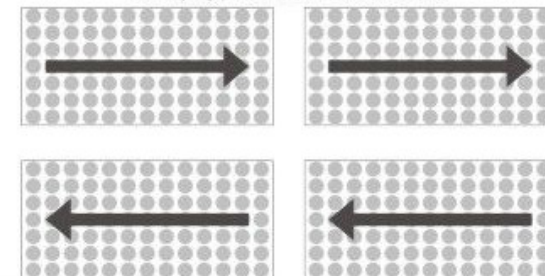

Please note that the company does not accept any liability in case of problem arising out of non-adherence to the above fixing instructions

General Note:

All Technical Specifications in this catalogue are for Premium Grade material only. Decorative items are not covered under the same.

Disclaimer: Alfa Reserves the right to delete & amend either totally, any of the colors, shapes, sizes, reference and other technical specification contained in this catalogue at any time. The colors shown of times in this catalogue are purely illustrative and limited to printing process. Please refer actual sample before final selection. The details of sizes, color, references should be verified for typographical errors.

All complains need to be reported within 10 days of purchase in writing. Always follow instruction to avoid complains due to bad masonry.